

# HAS024 series 10W~24W

# Wall-Mount Adapter

## SINGLE OUTPUT




UNIVERSAL INPUT

## AC/DC Switching Adapter High Performance

### DIMENSION

- L75x W55x H34.5mm(Max.)

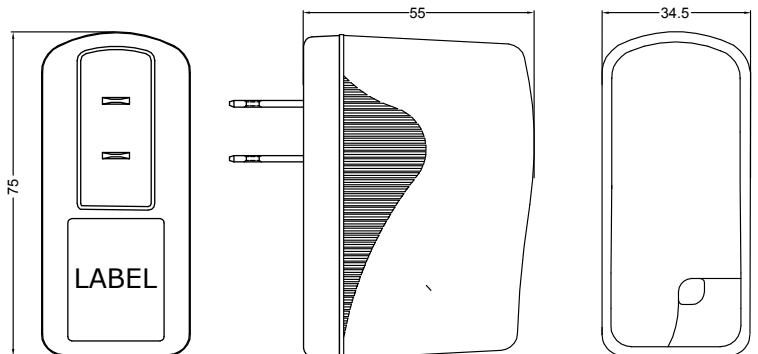

### FEATURE

- 90 to 264 VAC universal input
- High efficiency 80% typical
- High reliability
- Low ripple & noise
- Short circuit protection
- Over voltage protection
- Limited power source

AC plug type: with US/EU/UK/AA

### ENVIRONMENTAL

- Operating temperature: 0°C ~ +40°C
- Operating humidity: 20% ~ 85%
- Storage temperature: -40°C ~ +70°C
- Storage humidity: 10% ~ 95%
- Hi-pot 3,000VAC 1sec.(P. to S.) class II
- MTBF > 50,000hrs at 25°C

### Output Voltage/Current Rating Chart

Model Name	Output Wattage	Output Voltage	Output Current	Application
HAS010052Z-ZZ	10W	5V	2A	External enclosure, Set-Top box, Telecom, POS, DVD player...etc.
HAS015052Z-ZZ	15W	5V	3A	
HAS02009Z-ZZ	19.8W	9V	2.2A	
HAS01512Z-ZZ	15W	12V	1.25A	
HAS02412Z-ZZ	24W	12V	2A	
HAS01215U-ZZ	12W	15V	0.8A	



Approval standard : UL6950 EN60950

Safety application : 40°C Ambient temperature

★ Meets the requirements of these agencies



威海電子股份有限公司  
WEIHAI POWER ELECTRONICS CO.,LTD.

6F. -6, No.700, Jhongjheng Rd., Jhonghe Dist.,  
New Taipei City 235, Taiwan (R.O.C.)  
TEL: 886-2-82273718 FAX: 886-2-82273719  
E-MAIL: sales@wpe.com.tw