


# HTM350PH-F72 349W

# Open Frame Power

## MULTIPLE OUTPUT

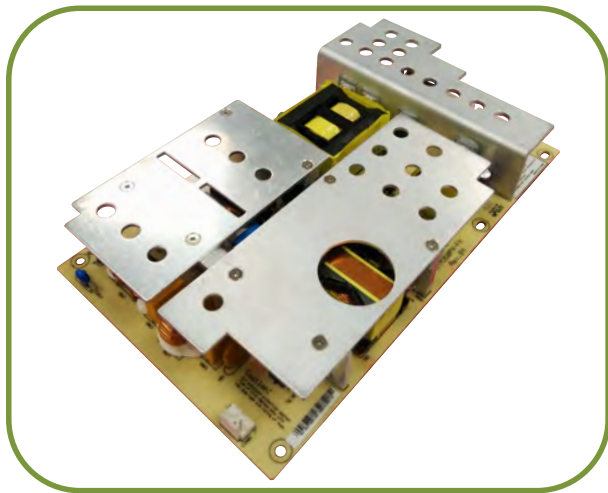


UNIVERSAL INPUT

## Power Saving Standard Mode High Performance

### DIMENSION

- L214x W140x H34mm(Max.)

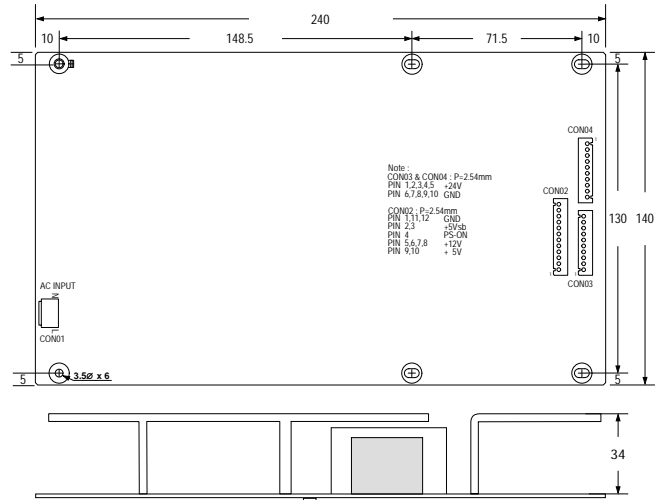

### FEATURE

- 90 to 264 VAC universal input
- Built-in EMI filter
- 100% burn-in
- Input surge current protection
- Over voltage protection
- Over current protection
- Temperatures protectio
- Open PCB construction
- PS-ON control
- Power factor correction > 0.9 at full load
- POWER Saving < 0.15W at 230VAC

### ENVIRONMENTAL

- Operating temperature: 0°C ~ +50°C
- Operating humidity: 20% ~ 85%
- Storage temperature: - 40°C~ +70°C
- Storage humidity: 10% ~ 95%

### Output Voltage/Current Rating Chart

### GENERAL SPECIFICATION

- Efficiency **86% type at full load**
- Hold- up time **8ms at full load, (115V)**
- Inrush current **80A/230 VAC**
- Withstand voltage **3000 VAC, input to output**
- MTBF **50,000 hours**
- Burn-in **100% for all shipped units**
- EMI requirements **Meets conduction limits of**  
a) FCC class B  
b) CISPR class B
- Safety requirements **Meets**  
a) UL 62368  
b) EN 62368

| Model Name   | Output | V norm. | I min. | I max. |        | Tolerance | Output Power Max. |
|--------------|--------|---------|--------|--------|--------|-----------|-------------------|
|              |        |         |        | Mode 1 | Mode 2 |           |                   |
| HTM350PH-F72 | #1     | 24V     | 0A     | 11A    | 12A    | ±5%       | 349W              |
|              | #2     | 12V     | 0A     | 5A     | 3A     | ±5%       |                   |
|              | #3     | 5V      | 0A     | 4A     |        | ±5%       |                   |
|              | #4     | +5Vsb   | 0A     | 1A     |        | ±5%       |                   |



威海電子股份有限公司  
WEIHAI POWER ELECTRONICS CO.,LTD.

6F. -6, No.700, Jhongjheng Rd., Jhonghe Dist.,  
New Taipei City 235, Taiwan (R.O.C.)  
TEL: 886-2-82273718 FAX: 886-2-82273719  
E-MAIL: sales@wpe.com.tw