


# HOM0502405-U1 50W

# DVD Player Power

## MULTIPLE OUTPUT

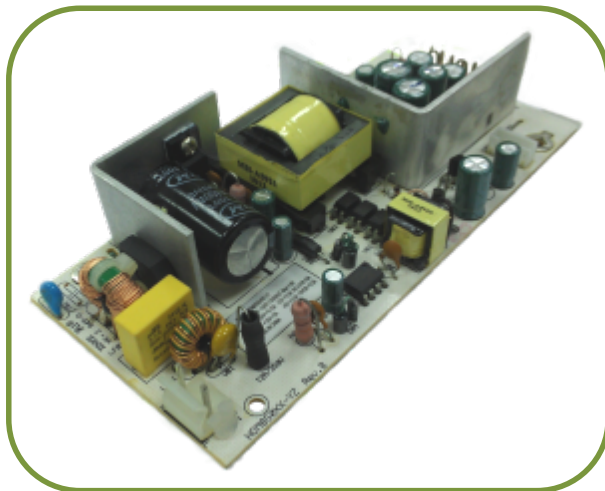

UNIVERSAL INPUT

## FEATURE

- 90 to 264 VAC universal input
- Built-in EMI filter
- 100% burn-in
- Input surge current protection
- Over voltage protection
- Over current protection
- Short circuit protection

## ENVIRONMENTAL

- Operating temperature: 0°C ~ +50°C
- Operating humidity: 20% ~ 85%
- Storage temperature: - 40°C~ +70°C
- Storage humidity: 10% ~ 95%

## Output Voltage/Current Rating Chart


Model Name	Output	V norm.	I min.	I max.	Tolerance	Output Power Max.
HOM0502405-U1	#1	+5Vsb	0A	0.2A	±5%	50W
	#2	+5V	0.2A	3.5A	±5%	
	#3	+12V	0.2A	2A(Peak 3A)	±10%	
	#4	-12V	10mA	0.3A	±10%	
	#5	-24V	10mA	0.15A	±10%	
	#6	AC 3.5V	0A	0.15A	-	

## AC/DC

## Switching Mode Power Supply

### DIMENSION

- L146x W70x H25mm(Max.)

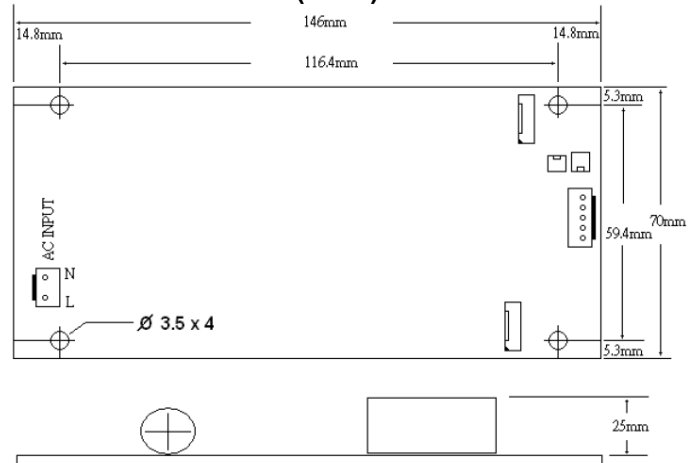

### GENERAL SPECIFICATION

- Efficiency: 76% type at full load
- Hold-up time: 8ms at full load, (115V)
- Inrush current: 60A(peak to peak)/230 VAC
- Withstand voltage: 1500 VAC, input to output
- MTBF: 50,000 hours
- EMI requirements: Meets conduction limits of  
a) FCC class B  
b) CISPR class B
- Safety requirements: Meets  
a) UL 60950  
b) EN 60950



威海電子股份有限公司  
WEIHAI POWER ELECTRONICS CO.,LTD.

6F. -6, No.700, Jhongjheng Rd., Jhonghe Dist.,  
New Taipei City 235, Taiwan (R.O.C.)  
TEL: 886-2-82273718 FAX: 886-2-82273719  
E-MAIL: sales@wpe.com.tw