

HAS065XX3F series 48W~65W Desk-Top Adapter

SINGLE OUTPUT



UNIVERSAL INPUT


*Power Saving Standard Mode
High Performance*

DIMENSION

- L116x W51.8x H33.5mm(Max.)

AC inlet : IEC-320-C14 & C6 Type

Unit : mm
Tolerance : ±0.2mm

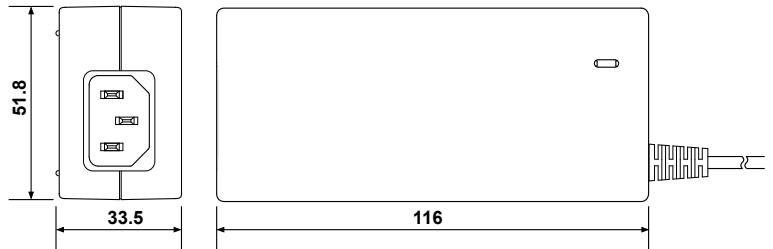

FEATURE

- 90 to 264 VAC universal input
- High efficiency 80% typical
- High reliability
- Low ripple & noise
- Short circuit protection
- Over voltage protection
- Limited power source

ENVIRONMENTAL

- Operating temperature: 0°C ~ +40°C
- Operating humidity: 20% ~ 85%
- Storage temperature: - 40°C~ +70°C
- Storage humidity: 10% ~ 95%
- Hi-pot 1,500VAC 60sec.(P. to S.) class I
- MTBF > 50,000hrs at 25°C

Output Voltage/Current Rating Chart

Model Name	Output Wattage	Output Voltage	Output Current
HAS050123F	50.0W	12.0V	4.16A
HAS060123F	60.0W	12.0V	5.0A
HAS060153F	60.0W	15.0V	4.0A
HAS048193F	48.0W	19.0V	2.5A
HAS060193F	60.0W	19.0V	3.16A
HAS048243F	48.0W	24.0V	2.0A
HAS060243F	60.0W	24.0V	2.5A
HAS060303F	60.0W	30.0V	2.0A
HAS060483F	60.0W	48.0V	1.25A
HAS065543F	65.0W	54.0V	1.2A
HAS065563F	65.0W	56.0V	1.16A



Approval standard : UL62368, EN62368

Safety application : 40°C Ambient temperature

★ Meets the requirements of these agencies



威海電子股份有限公司
WEIHAI POWER ELECTRONICS CO.,LTD.

6F. -6, No.700, Jhongjheng Rd., Jhonghe Dist.,
New Taipei City 235, Taiwan (R.O.C.)

TEL: 886-2-82273718 FAX: 886-2-82273719

E-MAIL: sales@wpe.com.tw