


HOS036120-UB 36W

DVD Player Power

SINGLE OUTPUT

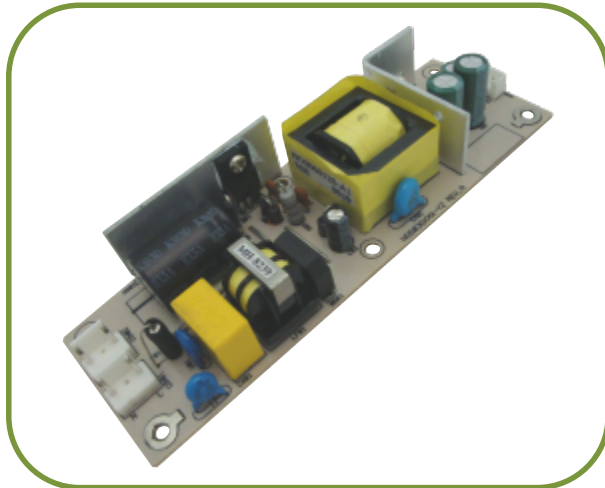


UNIVERSAL INPUT

AC/DC Switching Mode Power Supply

DIMENSION

- L150x W48x H25mm(Max.)

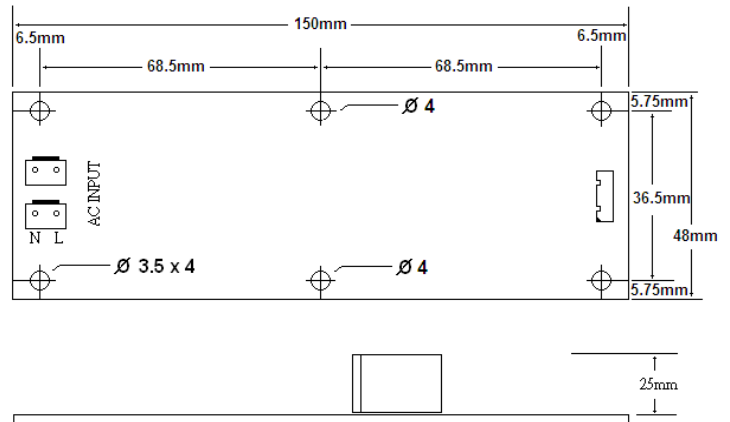

FEATURE

- 90 to 264 VAC universal input
- Built-in EMI filter
- Input surge current protection
- Over voltage protection
- Over current protection
- Over Power protection
- Short circuit protection

ENVIRONMENTAL

- Operating temperature: 0°C ~ +50°C
- Operating humidity: 20% ~ 85%
- Storage temperature: - 40°C~ +70°C
- Storage humidity: 10% ~ 95%

GENERAL SPECIFICATION

- Efficiency **82% type at full load**
- Hold- up time **8ms at full load, (115V)**
- Inrush current **60A/230 VAC**
- Withstand voltage **1500 VAC, input to output**
- MTBF **50,000 hours**
- Burn-in **100% for all shipped units**
- EMI requirements **Meets conduction limits of**
 - a) FCC class B
 - b) CISPR class B
- Safety requirements **Meets**
 - a) UL 60950
 - b) EN 60950

Output Voltage/Current Rating Chart

Model Name	V norm.	I min.	I max.	Tolerance	Output Power Max.
HOS036120-UB	12V	0A	3A	±5%	36W



威海電子股份有限公司
WEIHAI POWER ELECTRONICS CO.,LTD.

6F. -6, No.700, Jhongjheng Rd., Jhonghe Dist.,
New Taipei City 235, Taiwan (R.O.C.)
TEL: 886-2-82273718 FAX: 886-2-82273719
E-MAIL: sales@wpe.com.tw